

# Bailey

Sure-Ply  
PVC Roofing System

Versatile Single-Ply  
Roofing System



**BBA** APPROVAL  
INSPECTION  
TESTING  
CERTIFICATION  
TECHNICAL APPROVALS FOR CONSTRUCTION

**Agreement Certificate**

**20/5725**

# Key benefits

Suitable for new build and refurbishment projects.  
Mechanically fixed, adhered, heat welded.  
Installed over concrete, metal or timber decks.

Sure-Ply is a cost-effective, durable and lightweight PVC single-ply membrane, one of the most popular flat roofing membrane materials.

Bailey Sure-Ply is perfectly suited to projects where there are weight loading limitations to consider, combined with the need for a durable waterproofing system. Coupling these factors with Sure-Ply's competitive pricing makes this PVC system a popular choice for a range of applications.

All joints of a single ply membrane are sealed with hot air welding rather than flames meaning that PVC membranes provide a system that is free from the hazards of fire.



## Benefits and features

- No flame
- Versatile
- Can be adhered, mechanically fixed or ballasted
- Broof T4
- BBA Approved
- Durable and Lightweight
  - brilliant for application around difficult details
- Dimensionally stable
  - Polyester reinforcement to prevent shrinkage and shape loss.
- Life expectancy in excess of 40 years
- Cost effective





20 year warranty  
The Bailey Sure-Ply system is supported by our 20 year warranty†

## Uses and boundaries

The membrane comes in two types of varying thickness. Fleece-backed for an adhered applications and un-backed for a mechanically fastened system.

The system is quick to lay, versatile in tricky detailing situations and cost effective. It is suited to both new build and refurbishment projects.

## Ancillaries

The system comes complete ancillary products such as rainwater and parapet outlets, internal and external corners and walkway membrane.

## Warranty

Bailey's warranty collaborate approach:

- Specify/ Help with design
- Recommend approved installers
- Regularly monitor the installation of the product and provide reports
- Issue warranty on completion

† Terms and conditions apply \* Special order 3 week delivery

## Storage


Store in a clean, dry and covered area between temperatures of 5 and 25°C.

## System Performance Data


- 1.2mm unfleece 15 year\*
- 1.2mm fleece backed 20 year warranty
- 1.5mm unfleece 20 year
- 1.8mm unfleece 25 year\*

## Standard details


### Parpet Wall Coping Detail

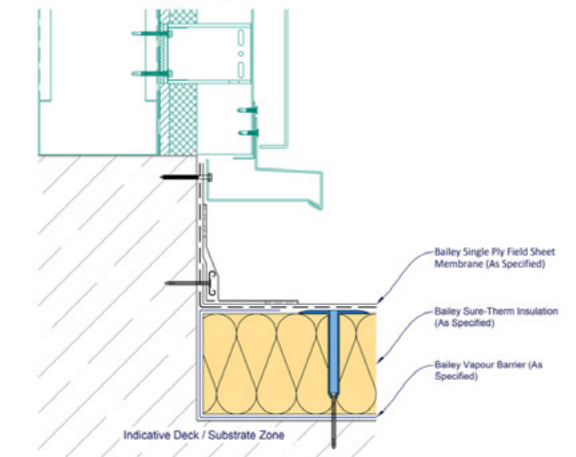


### Uprand To Cladding Detail

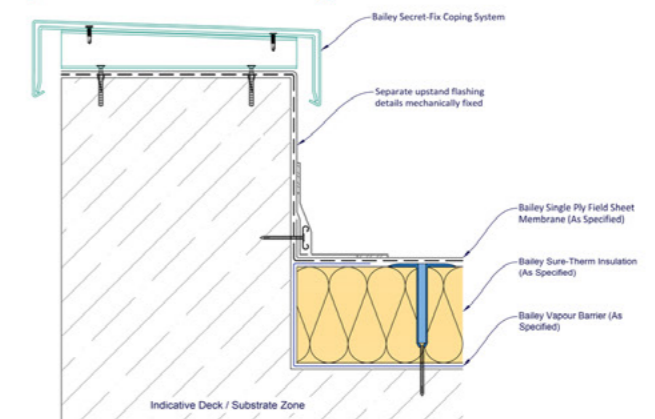

### Draining Edge Detail

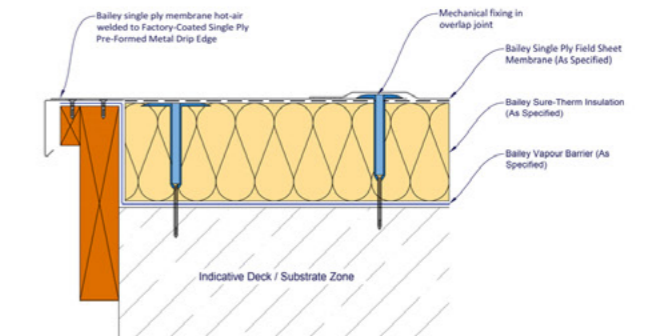

### Wall Cover Flashing Detail

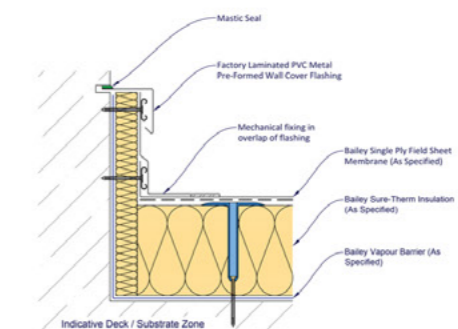

W  
E  
R  
E  
Y